



Hidden Fixings?  
No problem!




## Hidden Security Fixings for hanging pictures

### METHOD 1 (SIDE to SIDE)

*The SpringLOCK is a two part component consisting of a Bridge and a Locking Spring Insert. Depending on the amount of security required 2 or more SpringLOCKS can be used but in general only 2 are sufficient and the instructions for this method are shown below.*

1. Fit a complete two part SpringLOCK component, assembled, each side of the frame as shown right; these should be positioned about a third of the way down with the fixing screws going through the two slots in the Bridge. With practice a fitter will appreciate that by putting the screws at the top of these slots, levelling the picture will be easier when fitting.

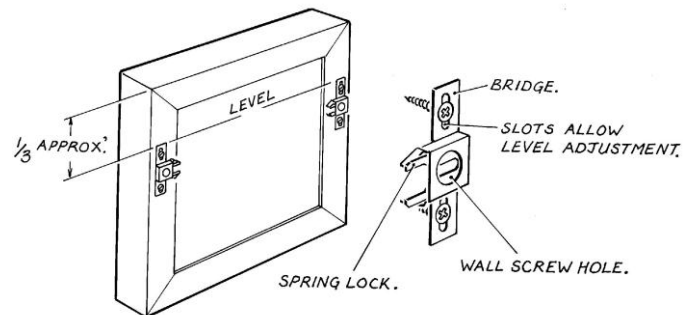


2. Measure across the frame the distance between the centres of the holes in the Bridge brackets. This may be done by measuring from the outside of one Bridge to the inside of the other as shown left.

Position your picture on the wall and mark the screw position of one of the SpringLOCK fixings. With a level mark the second screw position using the measured dimension taken between the two Brackets.



3. Drill the marked positions and fit any plugs. Fit any conventional screw of size 6, 8, or 10 leaving a clearance gap between the screw head and the wall (as shown right).

4. With the SpringLOCK Release tool, pull back (but do not remove) the Locking Spring Insert from the Bridges opening the screw holes in the bridge pieces. A slot in the Release Tool allows this function.



5. Hang the frame on the wall screws and check it is level. Levelling can be adjusted by sliding the bridges on their fixing slots. Sometimes this can be done by gently tapping down at one corner. Finally push the Locking Spring Inserts home.



**Once the picture is locked on the wall, you can only remove it with the Release Tool.**

